




## ALASKA 200 START 230V 12-24V

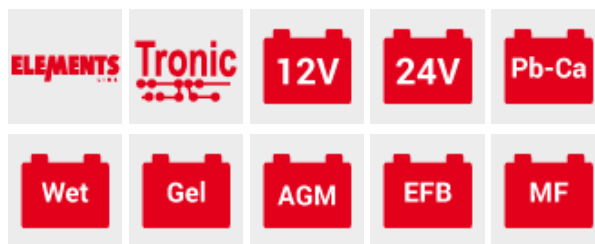

### Overview

#### ALASKA 200 START 230V 12-24V

cod. 807577

Battery charger and maintainer with electronic control of the charging current, automatic interruption and restart (TRONIC), for charging lead-acid batteries with 12/24V voltage of motorcycles, vehicles, vans, light trucks.

Charge options: normal CHARGE, BOOST quick charge, automatic TRONIC charge and maintenance of WET,GEL,AGM: SPIRAL,MF, START-STOP batteries.

#### Features:

- choice of CHARGE, TRONIC mode
- visualization of charging current (CHARGE)
- warning LED to indicate battery charge status, end of charge, maintenance (TRONIC)
- choice of outputvoltage, charge voltage, start
- protection against overloads and polarity reversal.



1 PH 230V



BOAT



VAN



MOTORCYCLE



TRACTOR



CE MARKING



CAR



SMALL VAN



EAC CERTIFICATION

### Technical data



CODE 807577



EFFECTIVE CHARGING CURRENT 23 / 12 A



ADJUSTMENT POSITIONS 2



## ALASKA 200 START 230V 12-24V

SINGLE PHASE MAINS VOLTAGE 230 V	RATED CHARGE CURR. EN60335-2-29 15 / 8 A	DIMENSIONS 24,5 - 19,5 - 13 cm
MAINS FREQUENCY 50 - 60 Hz	START CURRENT 1V/C EN60335-2-29 100 A	WEIGHT 7,57 kg
CHARGE POWER 0,3 KW	MAX STARTING CURRENT 150 A	EAN CODE 800489794849 2
START POWER 2,2 KW	MIN. RATED REFERENCE CAPACITY 25 / 30 Ah	PIECES/PALLET 72 pz/pallet
CHARGING VOLTAGE 12 / 24 V	MAX RATED REFERENCE CAPACITY 300 / 160 Ah	